


Fliesenlochboy



1. Mark the position of the hole on the tile.

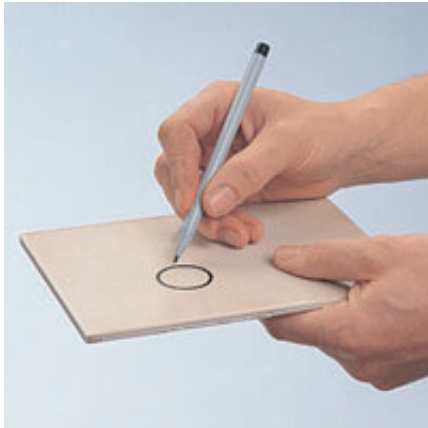

2. Insert the wall or floor tile so that the glazed surface of the tile is visible through the opening. Then tighten the spindle at the backside of the tile.



3. Start to knock out (with the point of the tile hammer) the hole in the middle and continue outwards. That way you can easily enlarge the hole diameter.



4. If you need other shapes or larger holes, you can work out any other diameter with the help of tile punch pliers.



Whether sockets or junction boxes, outlets or drain tubes, all these can be done rapidly, neatly and professionally with the Fliesenlochboy.

We wish you success and fun for your work. Please contact us if you have any questions.